

REFRIGERATED MODELS

FEATURES

- Refrigeration system keeps products at safe temperatures between 32°F and 40°F
- 2 Sliding glass doors
- Bright internal LED lighting on top and under each shelf
- 2 adjustable glass shelves
- Digital temperature control and display
- Dual-pane tempered glass
- 2" Castors with brakes
- Automatic Defrost
- Eco-friendly R290 refrigerant
- Condenser coil is easy to access for cleaning and service



WARRANTY


1 Year Parts and Labor

CERTIFICATIONS




SPECIFICATIONS


MODEL	Dimensions (in)			Voltage	Amp	Plug Type	Temperature	Shelves (Weight)	Refrigerant
	Length	Depth	Height						
LIN-R-36	36"	26.6"	47.2"	110/60Hz	8	5-15P	32°F to 40°F	2 (22Lbs)	R290
LIN-R-48	48"	26.6"	47.2"	110/60Hz	9	5-15P	32°F to 40°F	2 (22Lbs)	R290
LIN-R-60	60"	26.6"	47.2"	110/60Hz	10	5-15P	32°F to 40°F	2 (22Lbs)	R290
LIN-R-72	72"	26.6"	47.2"	110/60Hz	12	5-15P	32°F to 40°F	2 (22Lbs)	R290




LIN-36

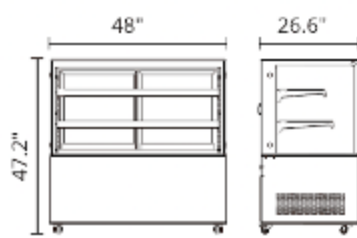

LIN-48

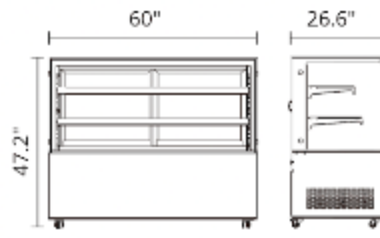

LIN-60

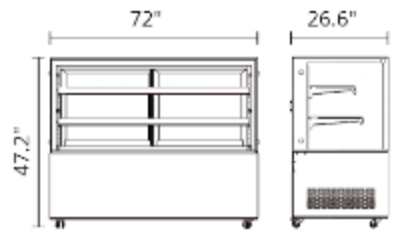

LIN-72

Iron Equipment reserves the right to make changes to the design or specifications without prior notice.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.