



SPECIFICATIONS

DISPLAY CASE

PORTLAND SERIES

REFRIGERATED MODELS

FEATURES

- Refrigeration system keeps products at safe temperatures between 32°F and 40°F $\,$
- 2 Sliding glass doors
- Bright internal LED lighting on top and under each shelf
- 2 adjustable glass shelves
- Digital temperature control and display
- Dual-pane tempered glass
- 2" Castors with brakes
- Automatic Defrost
- Eco-friendly R290 refrigerant
- Condenser coil is easy to access for cleaning and service







WARRANTY

1 Year Parts and Labor


CERTIFICATIONS







MODEL	Dimensions (in)			Voltage	Amp	Plug Type	Temperature	Shelves	Refrigerant
	Length	Depth	Height	Voitage	Amp	riug Type	remperature	(Weight)	Remigerant
POR-R-36	36"	26.6"	47.2"	110/60Hz	8	5-15P	32°F to 40°F	2 (22Lbs)	R290
POR-R-48	48"	26.6"	47.2"	110/60Hz	9	5-15P	32°F to 40°F	2 (22Lbs)	R290
POR-R-60	60"	26.6"	47.2"	110/60Hz	10	5-15P	32°F to 40°F	2 (22Lbs)	R290
POR-R-72	72"	26.6"	47.2"	110/60Hz	12	5-15P	32°F to 40°F	2 (22Lbs)	R290

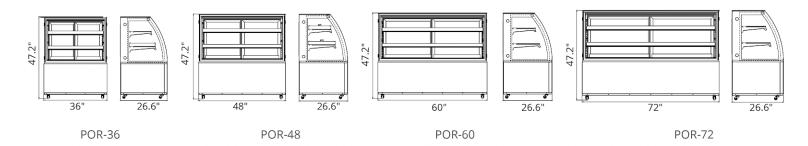

Iron Equipment reserves the right to make changes to the design or specifications without prior notice.

 \triangle WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.